


THANK YOU FOR SELECTING A HUSKY FLOOR LINER FROM WINFIELD CONSUMER PRODUCTS

CARE AND USE INSTRUCTIONS

Your new liner is custom molded to fit your Murano. Upon removal from the box your liner will not completely unroll and lay flat. This is normal and only temporary. Just place the liner on the floor or in the back of your vehicle with a weight in each corner (a book works well). After about 15 minutes, your liner will remain flat. In colder climates this “relaxing” may take longer; moving the liner inside will speed up the process.

Your liner is manufactured using an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409[®] or Glass Plus[®] work well. Use of Armor All[®], Son-of-a-Gun[®] or similar items is discouraged as these products make the liner slick.

INSTALLATION INSTRUCTIONS FOR YOUR NISSAN MURANO CARGO LINER

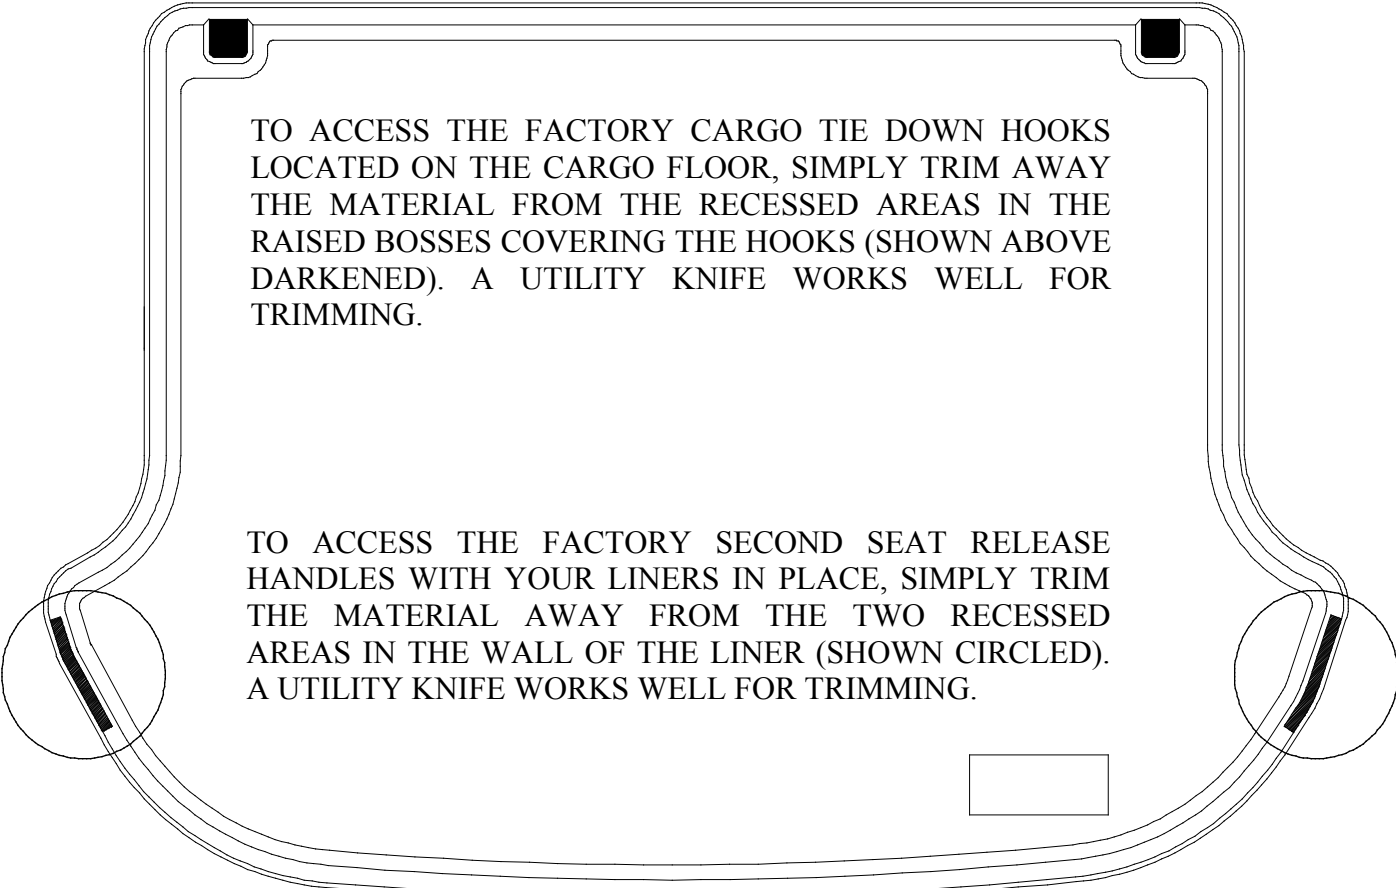

TO ACCESS THE FACTORY CARGO TIE DOWN HOOKS LOCATED ON THE CARGO FLOOR, SIMPLY TRIM AWAY THE MATERIAL FROM THE RECESSED AREAS IN THE RAISED BOSSES COVERING THE HOOKS (SHOWN ABOVE DARKENED). A UTILITY KNIFE WORKS WELL FOR TRIMMING.

TO ACCESS THE FACTORY SECOND SEAT RELEASE HANDLES WITH YOUR LINERS IN PLACE, SIMPLY TRIM THE MATERIAL AWAY FROM THE TWO RECESSED AREAS IN THE WALL OF THE LINER (SHOWN CIRCLED). A UTILITY KNIFE WORKS WELL FOR TRIMMING.