

2004 DURANGO REAR MUD GUARD SET

MUD GUARD INSTALLATION INSTRUCTIONS

Please read instructions thoroughly before installation.

Tools Required:

- 1/8" drill bit / Drill
- Center punch / Hammer
- Short Phillips screwdriver
- Marking utensil (fine tip marker, grease pencil, etc.)

Package Contents

- Driver & passenger side mud guard
- 1" #10 screws (qty. 2)
- Washer (qty. 2)
- U-clip (qty. 2)
- Instruction sheet

NOTE: It may be necessary to remove the rear wheels depending on the tools being used for installation.

1. Clean and degrease the mud guard location area on the fender before installation.
2. Remove existing fastener from location A and B (see Figure 1).
3. Attach mud guard to fender with existing fasteners at location A and B, check to make sure mud guard is evenly covering tire and is parallel to the ground.
4. Using mud guard as a template, mark and drill 1/8" hole at location C (Figure 1).
5. Attach mud guard to fender at location C with a 1" #10 screw and washer thru mud guard, fender liner and into a U-clip placed on the backside of fender liner. NOTE: U-clip is used as a nut and placed on the backside of liner – DO NOT CLIP OVER LINER.

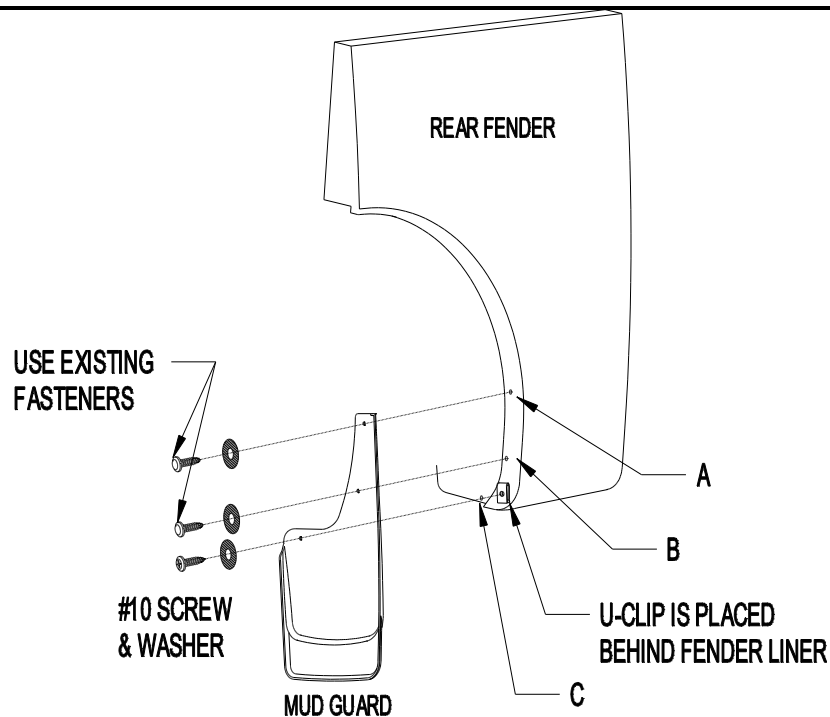


Figure 1

PAINTING INSTRUCTIONS

1. Clean mud guard with a soap and water solution to remove dirt and other contaminants.
2. Sand painting surface with 320 grit sand paper.
3. Apply a coating of flexible primer-adhesion promoter.
4. Apply a flexible paint as directed by the paint manufacturer